

OFFICE OF THE MARION COUNTY SURVEYOR  
SECTION RECORD CORNER

SECTION 14 TOWNSHIP 17 RANGE 2

DATE: 1-30-06

PARTY CHIEF: Wilcoxon

CREW: \_\_\_\_\_

TYPE OF MARKER: Harrison

METHOD OF ESTABLISHMENT: County: 4-18-00


IN. S.P.C. E ZONE NAD '83

NAME: 17021402

N: 519355.3973(m)

E: 48482.5619(m)

8.

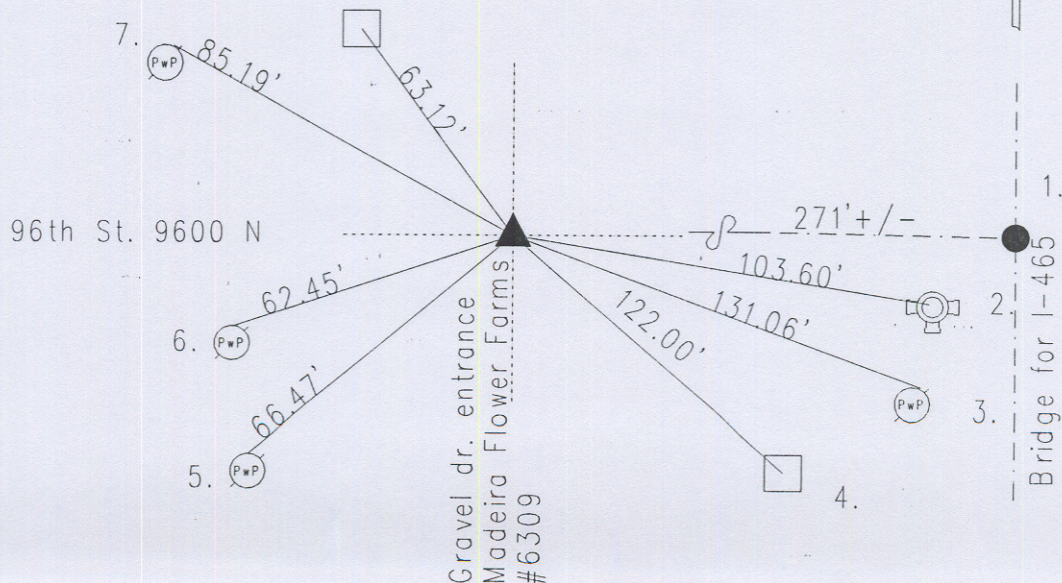

Original post set 1820 by Laughlin with witnesses: 14' beech N 68 E 5 links, 12' dog-wood S 45 W 30 links per Marion County Atlas pg. 1. No record of stone/witness fd. Kern 1-31-63 called bolt set flush in road. Burres 1-23-64 called stone 4' dn. Mose 5-63 called stone 4' dn. McLand 7-31-73 does not call out marker. Miller 4-9-75 called RR spike. Excavated by Kiste 8-21-95 RR spike fd at surface. Harrison set.

17021402

REF.	DISTANCE	DESCRIPTION
1.	271'+/-	Due E to Bridge of I-465
2.	103.60'	Top of fire hydrant
3.	131.06'	PK nail N PwP#34-154 8"up
4.	122.00'	Cut 'x' in top of R/W marker
5.	66.47'	Mag nail w/bw N PwP NO # 30'up
6.	62.45'	Mag nail w/bw N PwPno# 10'up
7.	85.19'	BLN mag nail w/washer NF PwP#056-765 55"up
8.	63.12'	Cut 'x' top of R/W marker